
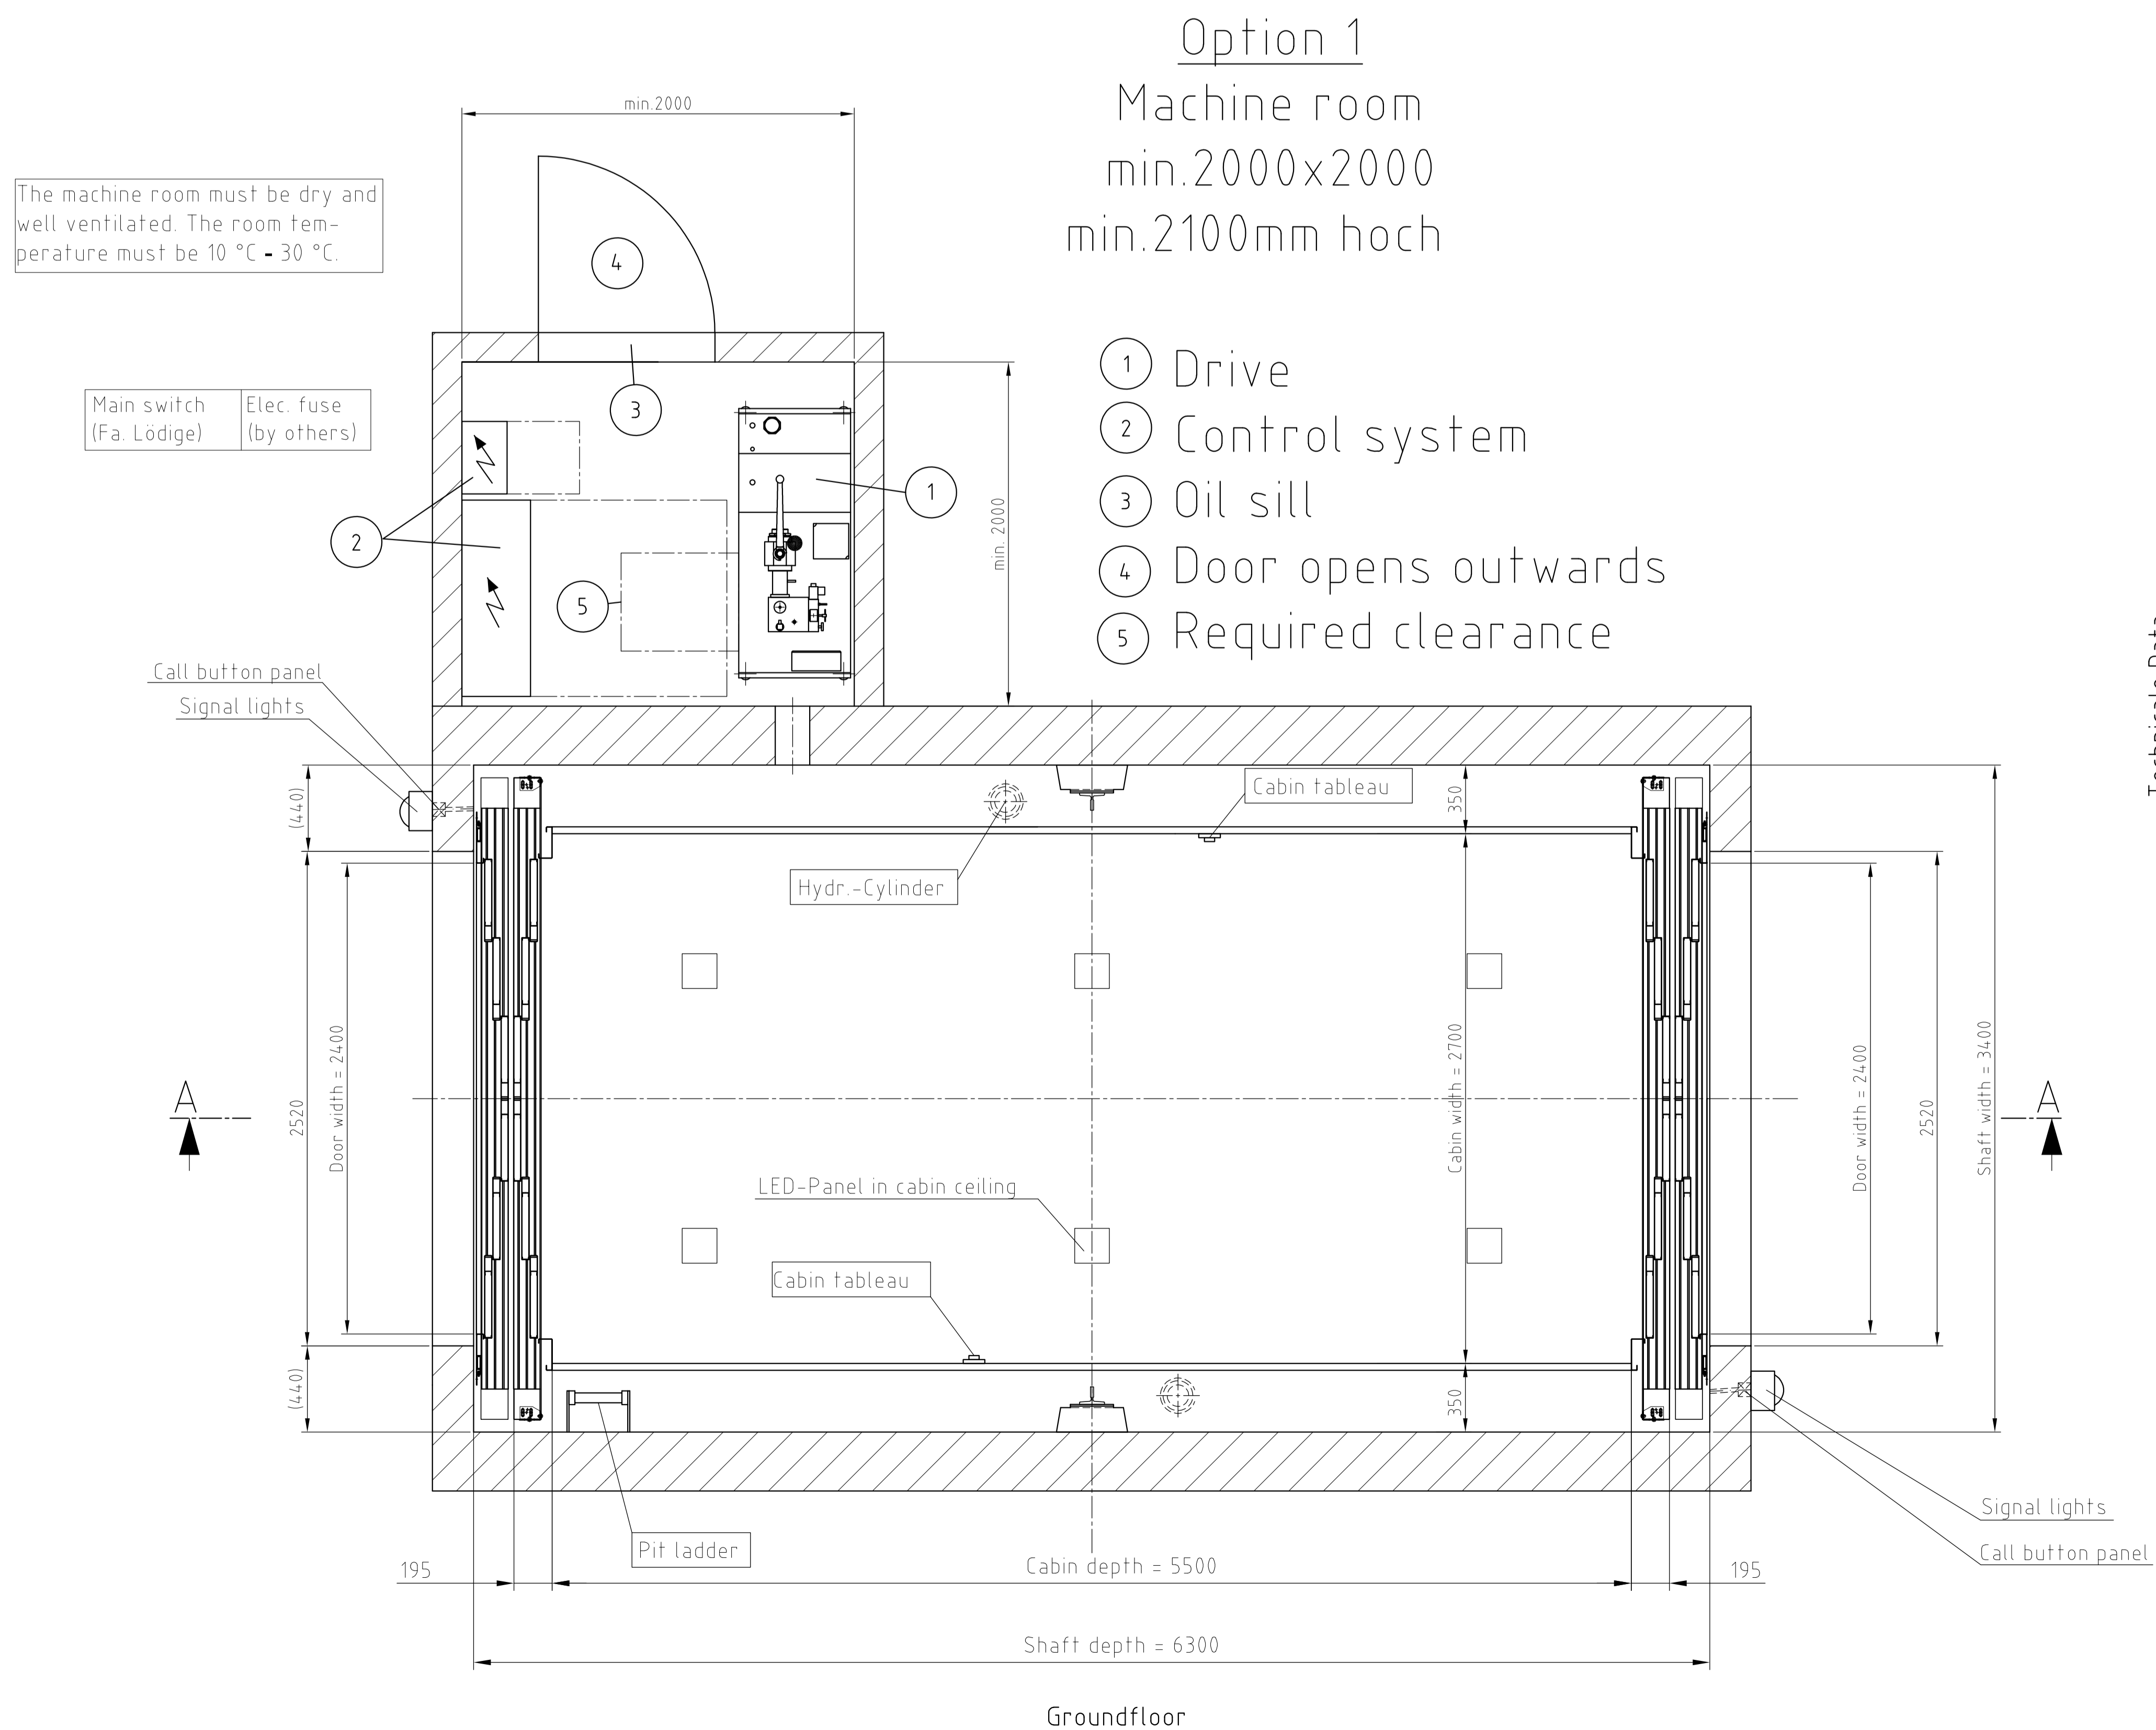


Section A - A

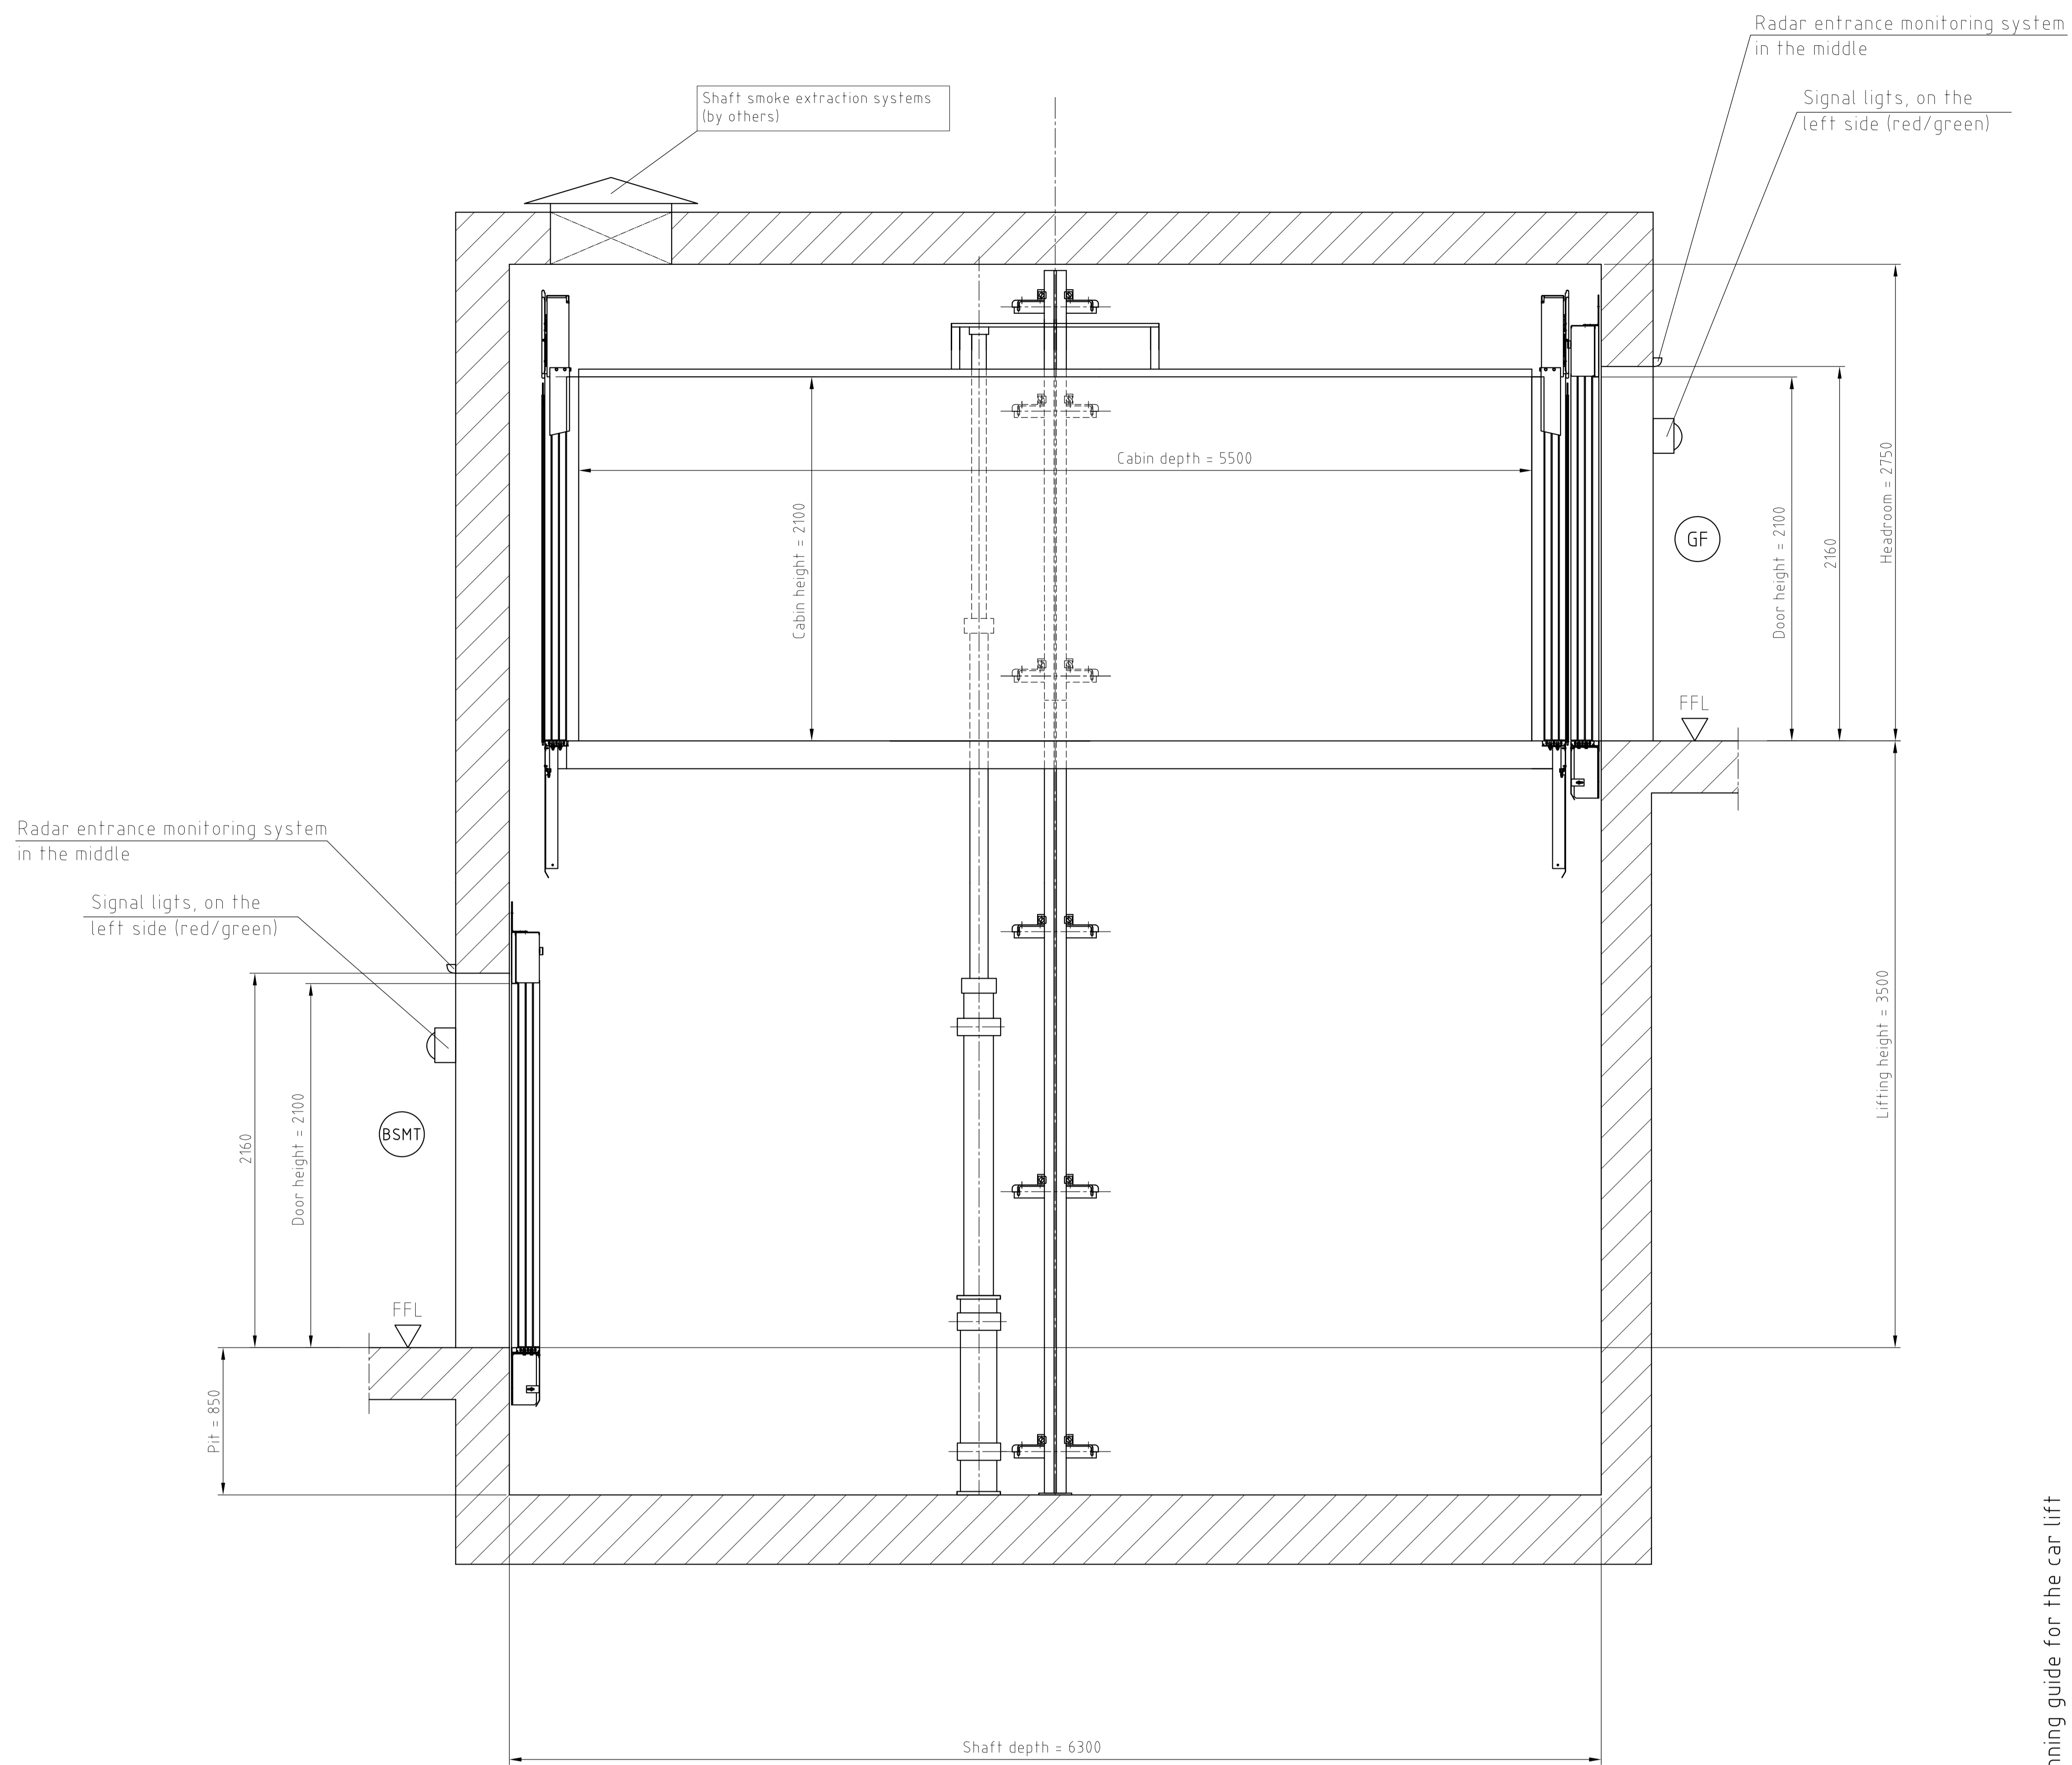

Option 1
Machine room
min.2000x2000
min.2100mm hoch

- ① Drive
- ② Control system
- ③ Oil sill
- ④ Door opens outwards
- ⑤ Required clearance

Technische Data:
The technical data listed here are examples. All data correspond to the information from the planning guide for the car lift Carrico & Traffico. Further information can be found there.

Example lift:	0,15 m/s	(can be reduced on request, technical clarification required)
Lifting speed:	2.700 mm	
Cabin width:	5.500 mm	
Cabin depth:	3.500 mm	
Lifting height:	850 mm	
Pit:	3.400 mm	
Shaft width:	6.300 mm	
Shaft depth:	2.750 mm	(can be reduced on request, technical clarification required)
Headroom:	2	
Number of stops:	2	through car loading
Entrances:	Option 1 of the planning guide	
Machine room:		

The technical data can be adapted to your wishes after consultation with you.

Notice:
This sample shaft drawing of the CARRICO® and TRAFFICO® car lift serves only as information material and does not replace the official shaft drawing. An official shaft drawing of the elevator is required for the final and detailed building planning. If necessary and in consultation with you, our sales department and our construction team will adapt this to your building project.

COPYRIGHT & DISCLAIMER
The content of these drawing template — particularly text and graphics — are protected by copyright. Unless indicated otherwise, copyright is held by Lödige Fördertechnik GmbH. The content of this document must not be published without the express consent of Lödige Fördertechnik GmbH. We reserve the right to make technical changes to the drawing template for the CARRICO® and TRAFFICO® car lift.

Hydr. Car- & Passenger Lift CARRICO after MD 2006/42/EC
Payload: 3.500 kg or 4.6 Passengers
Lifting speed 0,15 m/s

Proj. No.	13.07.020	Scale	1:20
Rev.		Name	TRAFICO
Rev.		Name	CARRICO
Rev.		Name	TEMPLATE

Lödige Fördertechnik GmbH
Lödige Straße 1
42699 Solingen
Germany