CAR PARK SOLUTIONS

TRAFFICO® CAR LIFT

TRAFFICO[®] is a perfect solution when higher throughput is required. It provides high level of comfort and offers numerous options that can be individually customised.



BENEFITS

- Quick and safe transportation
- High level of comfort and luxury operating elements
- Automatic travel in case of systems with two stopping points
- Particularly suitable for up to 40 parking places
- Numerous options for individual customisation
- Convenient operation through car recognition
- Type-tested according to ARL 2014/33/EC and DIN EN 81-20
- Nominal speed up to 0.6 m/s possible



NEW

CALL CARLIFT VIA APP

WWW.LODIGE.CO.UK



INCLUDED

- LED-Lighting
- Side panels and ceiling made of steel sheets
- Operating panel with stainless steel cover plate
- Hard wood ram protection
- Door made of galvanised steel
- Operating panels with position indicator for cars
- Car detection
- LED traffic light system

UPON CUSTOMER REQUEST


- Door finished in stainless steel
- Door frames finished in stainless steel
- Weather-proof design, protection degree IP54
- Special paint finishes for floor, doors, cabin walls and ceiling
- Radio remote control (app or hand transmitter) Call box
- Additional position indicator for cars
- Noise protection package
- Control and power unit in one cabin Variable cabin equipment
- Reduction of the shaft head
- Reduction of the shaft pit





CAR PARK SOLUTIONS

TRAFFICO® CAR LIFT | SHAFT LAYOUT

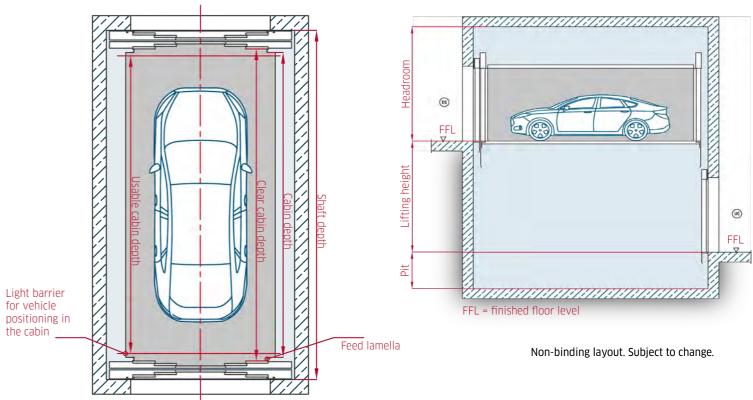

TECHNICAL DATA															
Туре	Cabin size				Nominal Load	Lifting speed	Door type	Drive type	Entrances	Shaft size				Door size	
Traffico (EN 81-20)	Lifting height [mm]	Cabin width [mm]	Cabin depth [mm]	Cabin height [mm]	[kg]	[m/s]			one side / through car	Shaft width [mm]	Shaft depth without Niche [mm]	Pit* [mm]	Shaft head* [mm]	Door width [mm]	Door height [mm]
	3,000	2,800	5,800	2,100	3,500	0.16-0.6	6-part doors	directly hydr.	one side	3,500	6,300		3,350	2,450	2,100
									Through car	3,500	6,600				
	6,000	2,800	5,800	2,100	3,500		6-part doors	directly hydr.	one side	3,600	6,300	- 1,250	3,400	2,550	2,100
									Through car	3,000	6,600				
	9,000	2,800	5,800	2,100	3,500		6-part doors	directly hydr.	one side	3,600	6,300		3,500	2,550	2,100
									Through car		6,600				
	9,000 to 25,000	2,800	5,800	2,100	4,400		6-part doors indirectly	indiractly by dr	one side	3,750	6,300		3,450	2,650	2,100
								mulrectly hydr.	Through car		6,600				

¹ Shaft head according to EN81-20

² Different cabin- & door heights possible; min. cabin heights 2000mm













Müggenkampstrasse - Hamburg, Germany



Wildbachstrasse - Zurich, Switzerland



Underground car park - Zurich, Switzerland



Garage Zenith SA - Sion, Switzerland



Garage Swissotel - Zurich, Switzerland



Münchhaldeneck - Zurich, Switzerland

WWW.LODIGE.CO.UK



Dorfstrasse, Winterthur - Zurich, Switzerland



Bollerweg - Wädenswil, Switzerland



WE WOULD BE PLEASED TO ADVISE YOU:

Lödige Ltd. (UK) | Laxton House Crabtree Office Village | Eversley Way TW20 8RY Egham | United Kingdom Tel.: +44 1784 221140 | Fax: +44 1784 471425 Email: uk@lodige.com Lodige-CPS_FLY_TRAFFICO_EN_LUK_210422



24/7 Service Hotline

We offer full service for your equipment after the installation: maintenance, spare parts, etc. Feel free to contact us.

