

PRACTICAL. EASY. RELIABLE.

- Can be easily integrated into existing buildings or rack systems
- Free-standing lift structure
- Tailor-made cabin dimensions
- Minimal pit required
- No separate machine room necessary
- Easy and fast installation
- In accordance with European Machinery Directive 2006/42/EG





SHERPA® GOODS LIFT





INCLUDED

- Self-supporting steel shaft with sheet metal cladding
- Cabin made of steel
- Shaft supplied prime coated or galvanised
- Primed or painted hinged doors
- Drive integrated in the shaft head
- Control mounted on the shaft cabinet
- Energy-saving gear motor with an integrated disk brake


UPON REQUEST

- Frequency converter
- Fire-resistant doors
- Ramp instead of pit
- Ram protection in the cabin
- External key switch
- Cabin ceiling with LED-lighting
- Finishes in RAL-colors
- Further options possible

Energy classes



Through our ecological design we usually achieve with our goods lifts energy class A.

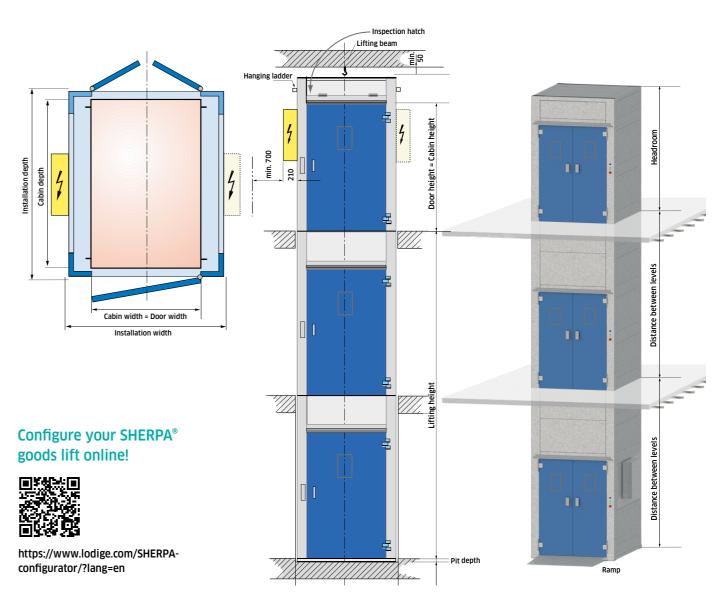

TECHNICAL DATA	
Load capacity	up to 4,500 kg
Nominal speed	0.2 m/s
No. of stopping points	2 to 6
Lifting height	up to 18 m
Cabin width	900 to 2,800 mm
Cabin depth	1,200 to 4,500 mm
Cabin height	1,800 to 2,800 mm
Shaft depth	1,270 to 3,600 mm
Shaft length	1,340 to 4,840 mm
Pit depth (depending on the load capacity)	70/90/110/130/150 mm

Special designs in terms of size, conveying height and material possible on request. Technical specifications for planning purposes only. Subject to change.



INSTALLATION EXAMPLES

















WE WOULD BE PLEASED TO ADVISE YOU:

Lödige Industries GmbH Wilhelm-Lödige-Str. 1 | 34414 Warburg

Tel.: +49 5642 702-0 Fax: +49 5642 702-111 E-mail: info@lodige.com

WWW.LODIGE.COM





Lödige Service

We offer full service for your equipment after the installation: maintenance, spare parts, etc. Feel free to contact us.

